

## TD-LTE Wireless Data Terminal

# Quick Installation Guide

### Items list

Power Adapter × 1  
4G Wireless Router × 1  
User Manual × 1

### Indicator Description



Picture	Interface	Status	Description
	Power	Blue always on	Normal use of battery power or no battery access.
		Yellow flashing	Battery is charging.
	WiFi	Blue always on	WiFi is working.
		Blue flashing	WiFi is running with internet.
		Blue off	WiFi off.
	Network	Blue Always on	Network access.
		Red off	No network access.
	Signal strength	5 levels, from weak to strong for mobile network access.	

### Interface & Button Description

Interface	Function
DC	DC power input jack
RESET	Long press for more than 3 seconds, the router will be restored to factory settings.
RJ45	WAN/LAN function
RJ11	Connect to the phone for voice. (Optional)
SIM card slot	Only supports Micro SIM card.
WiFi Key	Long press for 3 seconds to turn on or turn off WiFi function.
WPS Key	Long press for 3 seconds to turn on WPS function.
POWER	Press to power on or power off.
USB	Debug interface and also enable RNDIS dial-up Internet access.

### Working environments

To ensure device works properly, the working environment is recommended as follows:

- Keep away from heat and keep ventilation.
- Place device on the flat surface.
- Place device in dry environment without dust.
- Cut off power supply and all wirings in thunderstorm weather in case of lightning stroke.

Note: Please use the rated power supply for the device, otherwise the device may get damaged.

### FAQ

Q1: How to enter the management page?


1). Enter the IP address that shows on the router label and then press Enter to enter login page. It will pop up the login page

Q4: How to set APN?


Click "Network settings"->"APN" to enter to the APN setting page, then select "Manual"->"Add New", then enter profile name and APN that provided by the 3G/4G ISP, and click "Apply". It will prompt "Success" if set successfully!

Note: Please switch off the network before APN setting, click the switch to "Off" under the network connection.

2). Enter default administrator login name: "admin", click Login, then go to the management page as below:

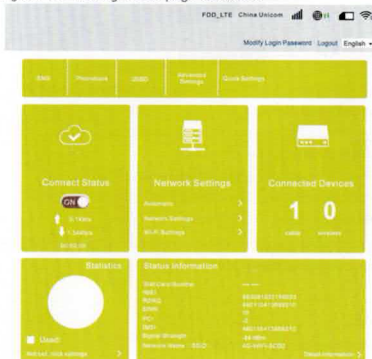

Q2: How to check WiFi name, password and other settings?  
Click "Wi-Fi Settings" on the homepage to enter the Wi-Fi Settings page to check & set WiFi information.

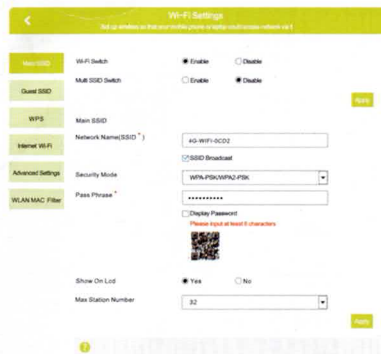

Q3: What are WPS quick connection methods?  
Long press WPS button for 3 seconds, click WPS Connection in the phone, wait for a while, then connect WiFi successfully!  
Also can enter "Wi-Fi Settings"->"WPS" to set PIN to connect.



Q5: How to restore factory settings?

Long press Reset button for 3 seconds or click "Advanced Settings"->"Others"->"Reset Factory Settings", and click "Yes" on the pop-up page to confirm.

